




SERIA 51100 (oporowe)




Oznaczenie łożyska	Wymiary główne (mm)						Nośność bazowa				Graniczne prędkości obrotowe (min)	
							(N)		(kgf)			
	d	D	d ₁	D ₁	H	r _{min}	C _a	C _{0a}	C _a	C _{0a}	Smar	Olej
51100	10	24	11	24	9	0,3	10100	14000	1030	1420	6700	10000
51101	12	26	13	26	9	0,3	10400	15400	1060	1570	6700	10000
51102	15	28	16	28	9	0,3	10600	16800	1080	1710	6300	9500
51103	17	30	18	30	9	0,3	11400	19500	1170	1990	6000	9000
51104	20	35	21	35	10	0,3	15100	26600	1540	2710	5300	8000
51105	25	42	26	42	11	0,6	19700	37000	2010	3800	4800	7100
51106	30	47	32	47	11	0,6	20600	42000	2100	4300	4300	6700
51107	35	52	37	52	12	0,6	22100	49500	2250	5050	4000	6000
51108	40	60	42	60	13	0,6	27100	63000	2770	6400	3600	5300
51109	45	65	47	65	14	0,6	28100	69000	2860	7050	3400	5000
51110	50	70	52	70	14	0,6	29000	75500	2960	7700	3200	4800
51111	55	78	57	78	16	0,6	35000	93000	3600	9500	2800	4300
51112	60	85	62	85	17	1	41500	113000	4250	11500	2600	4000
51113	65	90	67	90	18	1	42000	117000	4300	12000	2400	3800
51114	70	95	72	95	18	1	43500	127000	4450	12900	2400	3600
51115	75	100	77	100	19	1	43500	131000	4450	13400	2200	3400
51116	80	105	82	105	19	1	45000	141000	4600	14400	2200	3400
51117	85	110	87	110	19	1	46500	150000	4700	15300	2200	3200
51118	90	120	92	120	22	1	60000	190000	6150	19400	1900	3000

51120	100	135	102	135	25	1	86000	268000	8750	27300	1700	2600
51122	110	145	112	145	25	1	88000	288000	8950	29400	1700	2400
51124	120	155	122	155	25	1	90000	310000	9150	31500	1600	2400
51126	130	170	132	170	30	1	105000	350000	10700	36000	1400	2000
51128X	140	178	142	180	31	1	107000	375000	11000	38500	1300	2000
51130X	150	188	152	190	31	1	110000	400000	11200	41000	1300	1900
51132X	160	198	162	200	31	1	113000	425000	11500	43500	1200	1900
51134X	170	213	172	215	34	1,1	135000	510000	13800	52000	1100	1700
51136X	180	222	183	225	34	1,1	136000	530000	13800	54000	1100	1700
51138X	190	237	193	240	37	1,1	172000	655000	17500	67000	1000	1600
51140X	200	247	203	250	37	1,1	173000	675000	17600	69000	1000	1500
51144X	220	267	223	270	37	1,1	179000	740000	18200	75500	950	1500
51148X	240	297	243	300	45	1,5	229000	935000	23400	95000	850	1200
51152X	260	317	263	320	45	1,5	233000	990000	23800	101000	800	1200
51156X	280	347	283	350	53	1,5	315000	1 310 000	32000	134000	710	1000
51160X	300	376	304	380	62	2	360000	1 560 000	36500	159000	600	900
51164X	320	396	342	400	63	2	365000	1 660 000	37500	169000	600	900
51168X	340	416	344	420	64	2	375000	1 760 000	38500	179000	560	850
51172X	360	436	364	440	65	2	385000	1 860 000	39000	190000	560	800

* - Informacje zawarte w tabeli są informacjami poglądowymi, za które firma DORMET nie odpowiada.



Wymiary zabudowy

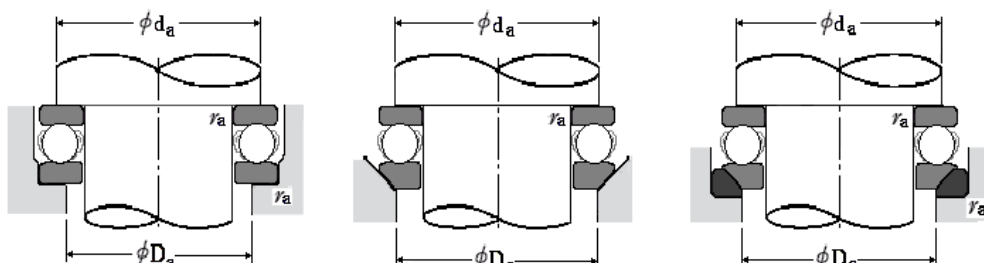

Oznaczenie łożyska	Wymiary zabudowy (mm)		
	d_a min	D_a max	r_a max
51100	18	16	0,3
51101	20	18	0,3
51102	23	20	0,3
51103	25	22	0,3
51104	29	26	0,3
51105	35	32	0,6
51106	40	37	0,6
51107	45	42	0,6
51108	52	48	0,6
51109	57	53	0,6
51110	62	58	0,6
51111	69	64	0,6
51112	75	70	1
51113	80	75	1
51114	85	80	1
51115	90	85	1
51116	95	90	1
51117	100	95	1
51118	108	102	1
51120	121	114	1
51122	131	124	1
51124	141	134	1
51126	154	146	1

51128X	164	156	1
51130X	174	166	1
51132X	184	176	1
51134X	197	188	1
51136X	207	198	1
51138X	220	210	1
51140X	230	220	1
51144X	250	240	1
51148X	276	264	1,5
51152X	296	284	1,5
51156X	322	308	1,5
51160X	348	332	2
51164X	368	352	2
51168X	388	372	2
51172X	408	392	2

* - Informacje zawarte w tabeli są informacjami poglądowymi, za które firma DORMET nie odpowiada.